

IC-2730 Addendum:


Activating Cross-Band Repeat Mode

To Activate Cross-Band Mode

Before you activate cross-band, set the frequencies you will need.

Note: Once this procedure has been completed, the cross-band feature will now appear in the menu unless a full reset is performed.

1. Press and hold both MAIN keys, MONI, and then press power.
2. Press MENU.
3. Rotate a tuning knob and select **EXMENU**.
4. Press MW. Rotate a tuning knob and select **OTHERS**.
5. Press MW. Rotate a tuning knob and select **RPT M**.
6. Press MW. Rotate a tuning knob and select **START**.
7. Press MW. Rotate a tuning knob and select **YES**.
8. Press MW. The display will show both bands with **rPt** listed under the frequencies. The cross-band feature is now activated and you may operate in cross-band mode.

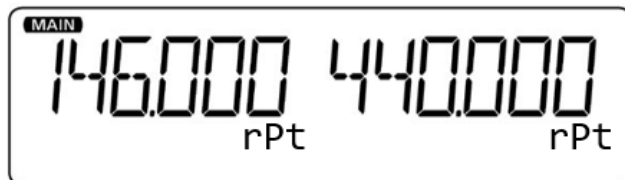

To Exit Cross-Band Repeat Mode

1. Press Menu.
2. Rotate a tuning knob and select **YES**.
3. Press MW. To return to cross-band repeat mode, perform steps 2- 8 as above.