


# ELECRAFT AX1 / AX2 COMPARISON CHART

The table below shows how the new AX2 20 meter mini-whip compares to our original AX1 multi-band whip. Both are designed for lightweight portable operation. **For further details, refer to the individual product brochures.**

The versatile **AX1** covers multiple bands via a selector switch, and can handle up to 30 W continuous TX power.

The ultra-compact **AX2** has a new anti-tilt base design that minimizes BNC connector wobble – ideal for hand-held (HT-style) use. While the AX2 covers 20 meters as shipped, it can be modified by the user to cover any single band from 17 through 6 meters. The base unit includes small tabs that can be clipped off to identify the target band.

**NOTE: Both whips are intended to be used with an ATU to compensate for terrain, body capacitance, height, etc.**

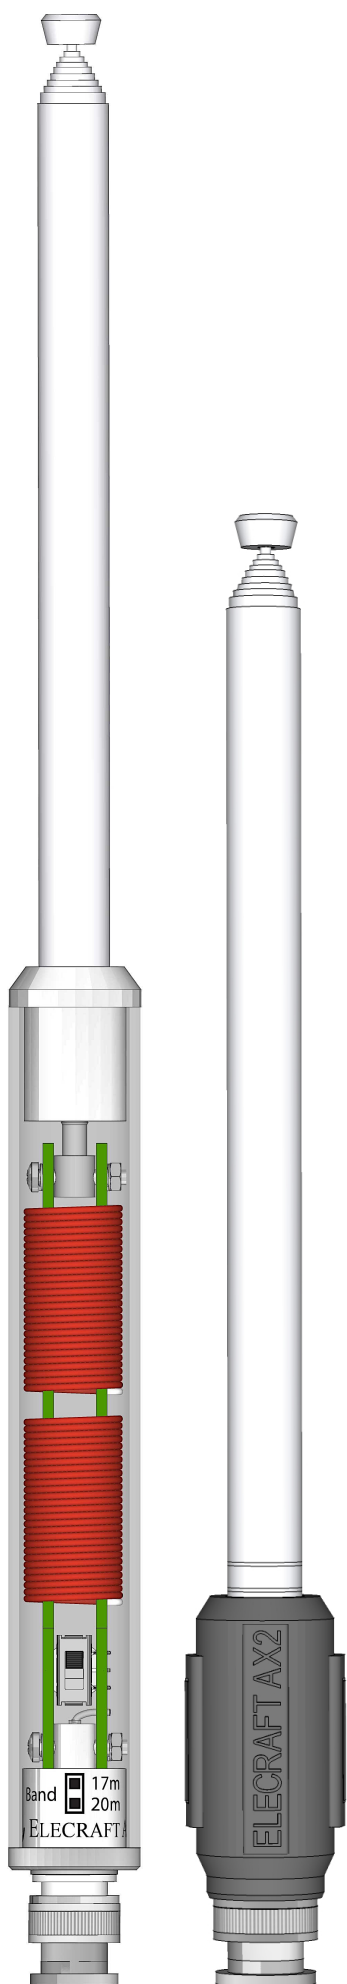

	<b>AX1</b>	<b>AX2</b>
<b>2-Piece Construction</b>	Yes	Yes
<b>Base Length</b>	6" (15 cm)	<b>2.5" (6.4 cm)</b>
<b>Whip (Collapsed)</b>	6" (15 cm)	6" (15 cm)
<b>Whip (Extended)</b>	45" (114 cm)	45" (114 cm)
<b>Bands (with ATU)</b>	<b>20/17/15</b>	20 m
<b>User-modifiable</b>	No	<b>Yes (17-6 m)</b>
<b>Power Rating</b>	<b>30 W</b>	15 W
<b>Band Switch</b>	<b>Yes</b>	No
<b>Anti-Tilt Design</b>	No	<b>Yes</b>
<b>40 meter Extender</b>	Yes	Yes
<b>Whip Bipod</b>	Yes	Yes
<b>Tripod Adapter</b>	Yes	Yes